

**Power supply for
door communication 24 V DC 700 mA**
2570 00

GIRA


Gira
Giersiepen GmbH & Co. KG
Postfach 1220
42461 Radevormwald
Germany
Phone +49 (0) 2195 - 602 - 0
Fax +49 (0) 2195 - 602 - 119
info@gira.com
www.gira.com

41 09 13 19/07

GIRA

Device description

The power supply for door communication 24 V DC is used as power supply for the video terminal.

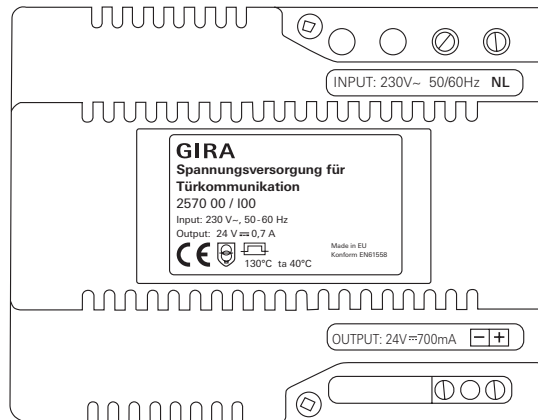

Connection and installation




Attention

Installation and mounting of electrical devices may only be carried out by a qualified electrician.

For installation protected from dripping and sprayed water, the power supply is mounted on a top-hat rail in the distribution.

The ventilation slits of the power supply must not be blocked.

The VideoTerminal is connected with screw terminals as shown in the illustration.

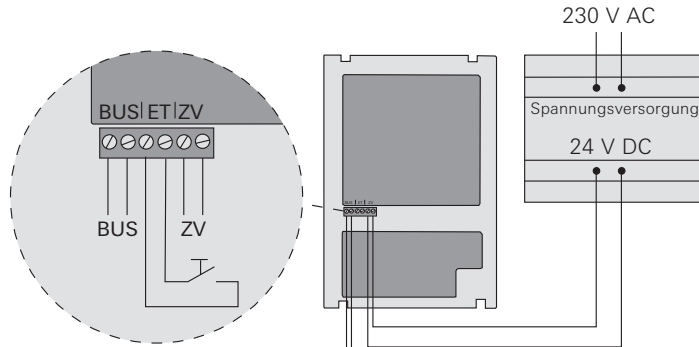

Technical data

Primary rated voltage: 230 V AC, 50/60 Hz

Secondary rated voltage: SELV 24 V DC

Secondary rated current: 0.7 A

Fuse: self-resetting electronic short-circuit protection

Dimensions: DRA with 6 modules

Temperature range: 5 °C to + 40 °C

Protection type: IP 20

Warranty

We provide a warranty in accordance with the statutory requirements.

Please send the device postage paid with an error description to our central customer service centre.

Gira
Giersiepen GmbH & Co. KG
Service Center
Dahlienstraße 12
42477 Radevormwald, Germany